



Data sheet 2230 L/S/H

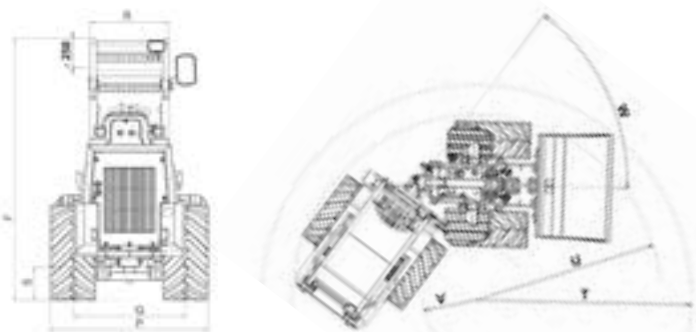

Nothing suitable yet?
Use our online product finder!

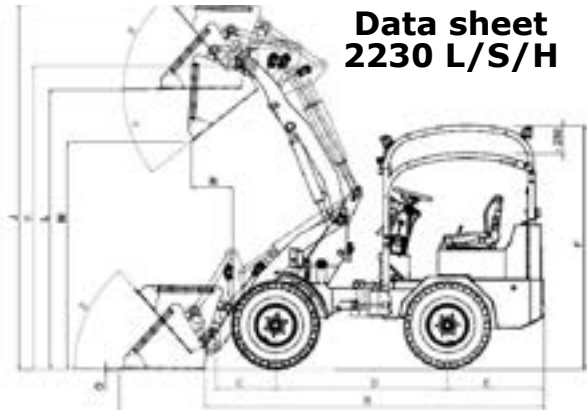

SCAN ME

Who is **THALER**

The company Thaler was founded in 1997 by Johann Thaler and son Manfred Thaler after giving up the existing agriculture in Polling, Upper Bavaria in Germany. In 2000 they build their first loader.

In 2009 the new plant with 4500 m² production area in Polling, Germany was completed.

The 60-strong Thaler team manufactures an average of 600 yard loaders per year (31 different types) and over 30 matching attachments in various sizes.

The family is particularly proud of the quality of the German products and the own training of the skilled workers.

Here it is still called:
Steel plate in - Yard loader out.



Thaler GmbH & Co. KG
Weidinger Str. 24
84570 Polling
Germany

Tel. +49 8633 50550-0
Fax +49 8633 50550-10
info@hoflader.com
www.hoflader.com

THALER



Because we know what's important!

2230 L/S/H



High-Quality
from Bavarian
production.



Your opinion is
important to
us.



Honest and com-
petent consulting
at all time.



All information subject to change.
Changes possible due to technical developments.



**Standard
with
hydrostatic
drive**

Engine	3-cylinder Yanmar diesel engine 18,9 KW (25hp)
Displacement	1331 ccm - 2800 rpm
Cooling	water cooler, oil cooler
Drive	hydrostatic transmission with automotive control/ 365 bar
Transmission	axial piston engine, cardan shaft
Work. hydraulic	approx. 38l/min, 180 bar
Speed	approx. 16 km/h, (2speeds)
Battery	12V - 45AH

	L	S	H
Lifting capacity	1600kg	1500kg	1300kg
Tipping load bucket machine straight	1400kg	1300kg	1100kg
Tipping load pallet fork (50cm) machine straight	1100kg	900kg	750kg
Hydraulic oil tank	35 l		
Diesel tank	28 l	37l	
Weight on front axle	470 kg	520kg	570kg
Weight on rear axle	1100 kg		
Empty weight	1570kg	1620kg	1670kg
Operating weight	1770kg	1820kg	1870kg



simple operation - high comfort

- change direction via rocker switch
- fast/slow (push button)
- Thaler-hook bracket system optional euro coupling system
- standard hydraulic coupling system with three-way valve
- great visibility through intelligent front carriage design

ergonomic workplace

- large footwell, no drive shaft hump
- easy access
- excellent overview
- individually adjustable steering column incl. hour meter and fuel gauge
- mechanically suspended comfort seat with security belt and operator restraint system conform to latest CE-Machinery directives
- ergonomic multi-functional joystick with intuitive operation
- Fops-Rops-cage (optional hydraulically by 25cm lowerable fops-rops-cage)

maintenance-friendly

- all lubrication points easy accessible (placed on the outside)
- large combined oil-water-cooler
- protective tubes on the hydraulic hoses
- Battery disconnecter (optional placed on the outside)
- solid steel platform tilts up for perfect accessibility for maintenance

features

- high tensile Thaler articulated pendulum joint for continuous ground contact of all 4 wheels
- CE-approval
- third hydraulic control circuit with cylinder function, hydraulic quick hitch as well as single lever-control with floating position as well as roadblock for cross control and third control circuit (mechanically)
- optimized Thaler-inch pedal
- 3 LED-working lights on the roof
- parallel-motion
- Thaler oil-collector-tube